


RIM DRIVE TECHNOLOGY

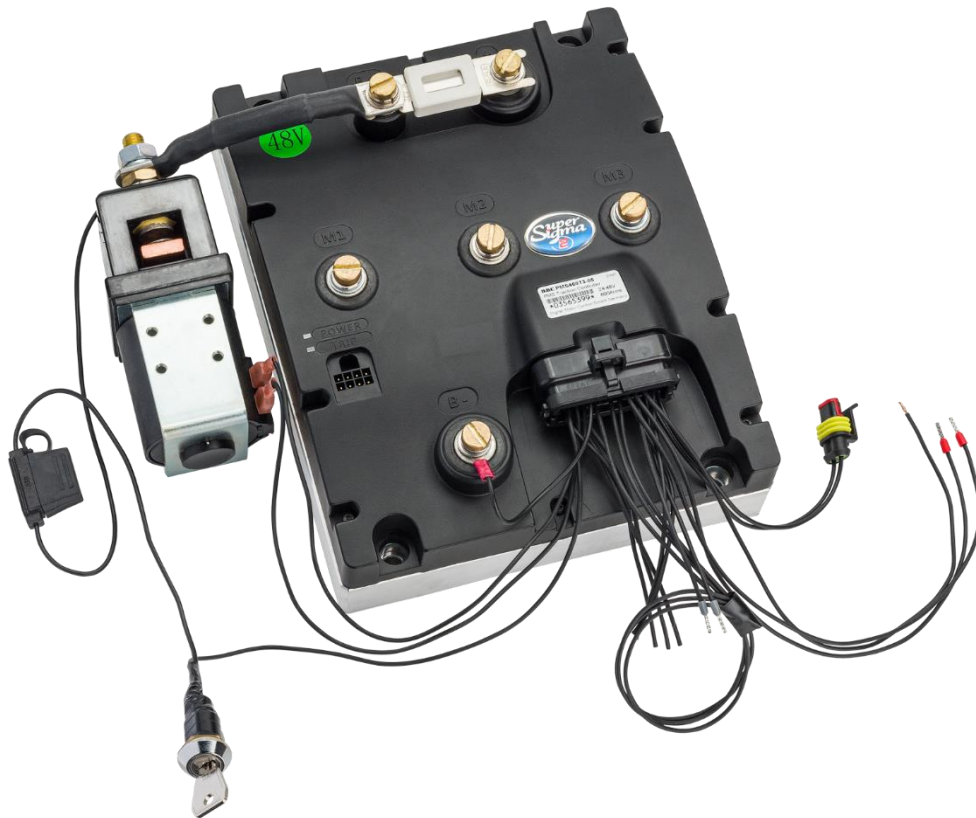

Motor controller 48V 250A

No rights can be derived from the contents of this document in any way,
nor can any claims be laid to this.

Why a Motor controller?

- Required to operate the motor
- Protects the motor and battery
- Switch off the motor in case of technical difficulties
- Protects against unwanted operation
- Easy installation



Specifications

Nominal voltage	48V
Current limit (1 min)	250A
Nominal continuous current	130A
Dimensions (LxWxH)	160x200x72 mm
Weight	3.25 kg
Operating environment	-30°C up to +40°C
Storage environment	-40°C up to +70°C
Protection rating	IP65
Control inputs	Analogue, CANbus (Optional)
Outputs	Wires for LED

RIM DRIVE TECHNOLOGY



Dutch quality underwater

+31 (0) 85 482 48 55
info@rimdrivetechnology.nl