

RIM DRIVE TECHNOLOGY



English

Catalogue

Electric propulsion systems for leisure,
commercial and subsea applications.



FORGET
EXHAUST GASSES,
VIBRATIONS AND NOISE

A blue signature or logo consisting of stylized, overlapping letters and a long horizontal line extending to the right.

Table of contents

Our mission	4
Configurations	6
POD	8
Steerable POD	10
Outboard	12
Bow thruster	14
System functionalities	17
Batteries	21
Chargers	24
Accessories	25

Our mission

Our mission is to convince customers. Convince them that our motors work for many hours with a service intervals and the highest user experience. If we succeed with this mission, we will advance on our vision of a better eco-friendly future.

Purpose

Our purpose is to help as many people and companies as possible with the transition to electric boating.

Quality control

In order to guarantee the quality of our products, our production is located in the Netherlands. Not only is the production quality higher here, the monitoring of the quality is also a lot easier.

Accessories

We want to support our customers from start to finish. To realize this, we offer a wide range of accessories which increases the user friendliness of our motors. To provide the best customer experience, our accessories work efficiently with all our rim drive products.

Worldwide

We are operating in more and more markets in different countries. We are proud that our motors continue to be part of countless projects and applications around the world.

Sustainable

Our organization actively contributes to a sustainable world by developing innovative solutions for environmental challenges.

Did you know?

- A Rim Drive contains no oils and sealings.
- Rim Drive motors were founded in 1929.
- We offer all accessories but our systems are also compatible with most other marine brands.
- We are a CO2 neutral company due to compensation via treesforefree.nl
- We design and develop all parts in the Netherlands.
- A Rim Drive accelerates within 1.5 seconds from zero to full RPM.



Rim Drive: A Revolution in Propulsion

A Rim Drive contains its electric winding in the outer (stator) housing. This housing is casted to avoid any use of sealings. The inner housing which contains the magnetics is also potted to avoid any internal corrosion. The bearing system is water lubricated and will last for thousands of hours by normal use.

The combination of the inlet ring, outlet ring and propeller makes it the most efficient way of propulsion. Each part has been simulated via CFD analysis and intensively tested in real circumstances.

Why a Rim Drive?

- The POD 3.0, 5.0 and 11.0 can be switched easily due to the same mounting pattern.
- Rim Drive 30.0 and 50.0 have the same dimensions.
- Clockwise, counter clockwise and symmetric directions are available for every motor.
- All our products are saltwater resistant to ensure ease of installation for every boat.
- Rim Drives are available in POD, steerable POD, outboard and bow thruster.
- Rim Drive motors are sold in many other countries through our distributors.



An **immediate** acceleration response in comparison with conventional solutions.

A **compact** and **lightweight** design makes our products compatible for the smallest installation.

Because of the **stepless** controlling our rim drive motors can be operated proportionally.

No center shaft **limits** the chance that ropes, or fishing nets will get stuck in the propeller.

Only one rotating part which **reduce** the amount of maintenance.



Our configurations

POD motors

POD 0.5



POD 3



POD 5



POD 8



POD 11



Steerable POD

Steerable 3



Steerable 5



Steerable 8



Steerable 11



Steerable 15



Outboard

Outboard 3



Outboard 5



Outboard 8



Outboard 11



Outboard 15



Bow thruster

Bow thruster 0.5



Bow thruster 3



Bow thruster 5



Bow thruster 8



Bow thruster 11



POD 15



POD 22



POD 25



POD 30



POD 50



Steerable 22



Steerable 25



Steerable 30



Steerable 50



Bow thruster 15



Bow thruster 22



Bow thruster 25



Bow thruster 30



Bow thruster 50





POD

The better alternative for an inboard motor

Characteristics



Electric propulsion



Minimized components



Low in maintenance



One day installation



Keyswitch included



Electric or hybrid

Integration



New build or refit



Custom made projects



Specs

	POD 0.5	POD 3	POD 5	POD 8	POD 11
Power (kW)*	0.5	3.0	5.0	8.0	11.0
Nominal voltage (V)	48	24 or 48	24 or 48	48	48
Weight (kg)	2.5	3.5	5	14	14
Static thrust (kgf)**	7	31	62	120	156
Salt water resistant	Yes	Yes	Yes	Yes	Yes
Controller included	Yes	Yes	Yes	Yes	Yes

*Motor power is depending on water conditions, usage and installation.

**Will be less for 24V installations.

Simplified but better

A Rim Drive motor is the most simplified motor design which is ever made. But don't confuse simplified with less powerful.

Forget all internal components which are needed for a classic inboard motor!

After finalizing the production process a Rim Drive POD motor is consisting out of only eight parts without any sealing needed.

The newest POD range motors are the most efficient and powerful solution for your medium speed application.

Choose a Rim Drive motor and use the additional space for more batteries to easily realize an 8-hour run time capability.

This is limiting the amount of service even further than any other electric motor.

Most efficient propulsion at cruise speed

97% of the applications doesn't require high speed capabilities. In general high efficiency is needed at cruise speed to guarantee a full-day of pleasure. Up to medium speeds a rim drive is the most efficient propulsion solution available in the market.

POD 5.0

4.0 km/h - 6:00 hr.

7.0 km/h - 4:00 hr.

10.0 km/h - 2:00 hr.

*1x 10kWh RDT battery.

POD 8.0

4.0 km/h - 6:00 hr.

7.0 km/h - 4:00 hr.

12.0 km/h - 2:00 hr.

*1x 10kWh RDT battery.

POD 11.0

5.0 km/h - 6:00 hr.

9.0 km/h - 4:00 hr.

13.0 km/h - 2:00 hr.

*2x 10kWh RDT battery.

POD 15.0

5.0 km/h - 6:00 hr.

9.0 km/h - 4:00 hr.

15.0 km/h - 2:00 hr.

*2x 10kWh RDT battery.

*Tested on a 8 meter, 2500kg sloop. For more reference project please contact sales@rimdrivetechology.nl

POD 15	POD 22	POD 25	POD 30	POD 50
15.0	22.0	25.0	30.0	50.0
48	96	96	110	400 - 550
22	TBA	70	70	75
195	TBA	350	400	750
Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	No	No



Steerable POD

Zero turn steering for ultimate maneuverability

Characteristics



Electric propulsion



Minimized components



Low in maintenance



One day installation



Joystick, steering wheel or CAN



Electric or hybrid

Integration



New build or retrofit



Custom made projects



Specs

	Steerable POD 3	Steerable POD 5	Steerable POD 8	Steerable POD 11	Steerable POD 15
Power (kW)*	3.0	5.0	8.0	11.0	15.0
Nominal voltage (V)	24 or 48	24 or 48	48	48	48
Weight (kg)	21.5	23	32	32	37
Static thrust (kgf)**	31	62	120	156	195
Salt water resistant	Yes	Yes	Yes	Yes	Yes
Controller included	Yes	Yes	Yes	Yes	Yes

*Motor power is depending on water conditions, usage and installation.

**Will be less for 24V installations.

Steering types

Joystick



With a joystick steering system, you can effortlessly and intuitively control your boat by simply moving the joystick in the desired direction. It provides precise maneuverability and allows easy turning.

CAN (digital)




The boat control is electronically managed through a Controller Area Network system. This advanced system utilizes digital signals to optimize engine control and steering behavior, resulting in accurate, responsive, and reliable boat steering.

Steering wheel



With a steering wheel control, you have a familiar and traditional way of steering your boat. The steering wheel offers a comfortable grip and makes it easy to adjust the boat's course with smooth and precise steering input.

The next evolution in boat control

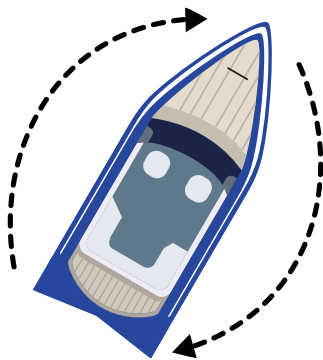

Zero turn

The steerable POD offers unparalleled manoeuvrability and control, making navigating tight spaces and challenging water conditions effortless.

Steerable POD 22	Steerable POD 25	Steerable POD 30	Steerable POD 50
22.0	25.0	30.0	50.0
96	96	110	400-550
TBA	110	110	110
TBA	350	400	750
Yes	Yes	Yes	Yes
Yes	Yes	No	No

Outboard

The strongest solution for heavy weight and medium speed applications

Characteristics



Electric propulsion



Integrated trim
Optional: electric trim



Low in maintenance



Integrated tilt
Optional: electric tilt



Fan cooling standard



Integration



New build or refit



Custom made projects

Specs

	Outboard 3	Outboard 5	Outboard 8	Outboard 11	Outboard 15
Power (kW)*	3.0	5.0	8.0	11.0	15.0
Nominal voltage (V)	24 or 48	24 or 48	48	48	48
Weight (kg)	22	25	34	35	40
Static thrust (kg)**	30	60	120	155	195
Salt water resistant	Yes	Yes	Yes	Yes	Yes
Controller included	Yes	Yes	Yes	Yes	Yes

*Motor power is depending on water conditions, usage and installation.


**Will be less for 24V installations.

Extreme efficiency

Our outboard motors can produce high torque, a valued feature among the owners of heavier boats. Combined with fast response time, and saltwater compatibility Rim Drive motors can be equipped in many applications.

Outboard engines offer versatile compatibility with various steering cylinders, featuring a convenient motor controller in the top cover, and provide a complete trim and tilt functionality for precise maneuvering and effortless control.

Reference project

Type Tour boat	Length 11 meters	PAX 32 pers.	
Motor 2x outboard 11.0	Weight 3500kg	Cruise speed 12 km/h	
Battery capacity 40kWh	Run time 5 hours	Power at cruise 2.6kW	

(2x) Outboard 11.0





Bow thruster

The best solution for continuous running times

Characteristics



Electric propulsion



Tunnel installation



Low in maintenance



Closed box installation



Extreme power

Integration



New build or retrofit



Custom made projects



Specs

	Bow thruster 0.5	Bow thruster 3	Bow thruster 5	Bow thruster 8	Bow thruster 11
Power (kW)*	0.5	3.0	5.0	8.0	11.0
Nominal voltage (V)	48	24 or 48	24 or 48	48	48
Weight (kg)	2.5	3.5	5	14	14
Static thrust (kg)**	5.5	23 / 25	50 / 55	120	140
Salt water resistant	Yes	Yes	Yes	Yes	Yes
Controller included	Yes	Yes	Yes	Yes	Yes

*Motor power is depending on water conditions, usage and installation.

**Will be less for 24V installations.


Features

Our bow thruster is the most quiet bow thruster on the market. The bow thruster is efficient and also available as a stern thruster.

The bow thruster is extremely compact which makes it possible to place it further in the nose of the boat.

Compability per boat length (m)

Choosing the right electric motor for a boat is crucial for optimal performance and efficiency on the water. In the table below, the compability per boat length is shown.

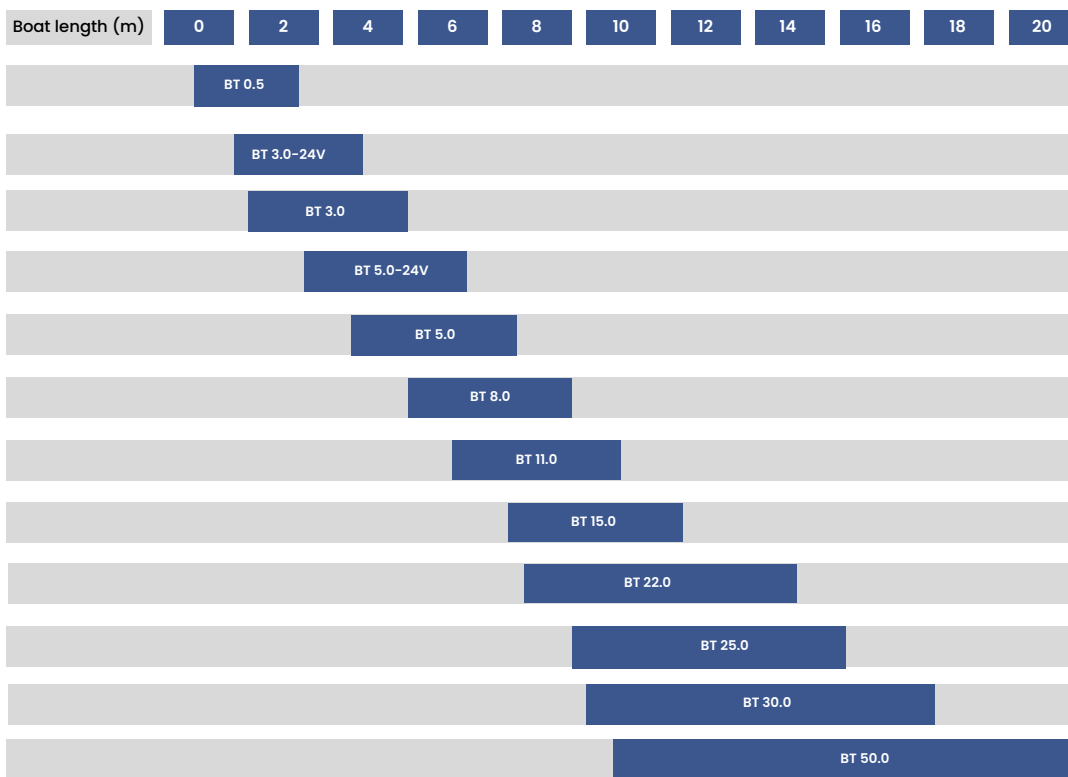


	Bow thruster 15	Bow thruster 22	Bow thruster 25	Bow thruster 30	Bow thruster 50
15.0	15.0	22.0	25.0	30.0	50.0
48	48	96	96	110 or 400	550
21	21	TBA	70	70	73
175	175	TBA	300	350	675
Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	No	No

Current electric boat trends

Identifying trends in the electric boating industry is vital for customers. It empowers them to make informed decisions, access cutting-edge technology, and embrace sustainability. Stay ahead, embrace change, and navigate the future of electric boating with confidence.


Are you considering making the switch to electric boating?

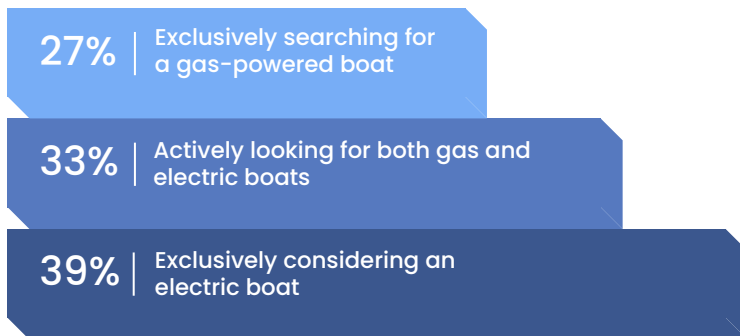

Empowering users with guidance and assistance ensures a smooth and successful shift towards electric marine mobility.

At our company, we are proud to witness a growing number of customers successfully transitioning to electric boating. These achievements are prominently showcased in our reference documents, serving as a testament to the reliability and effectiveness of our installations.

If you are hesitant to buy an electric boat, what would change your mind?

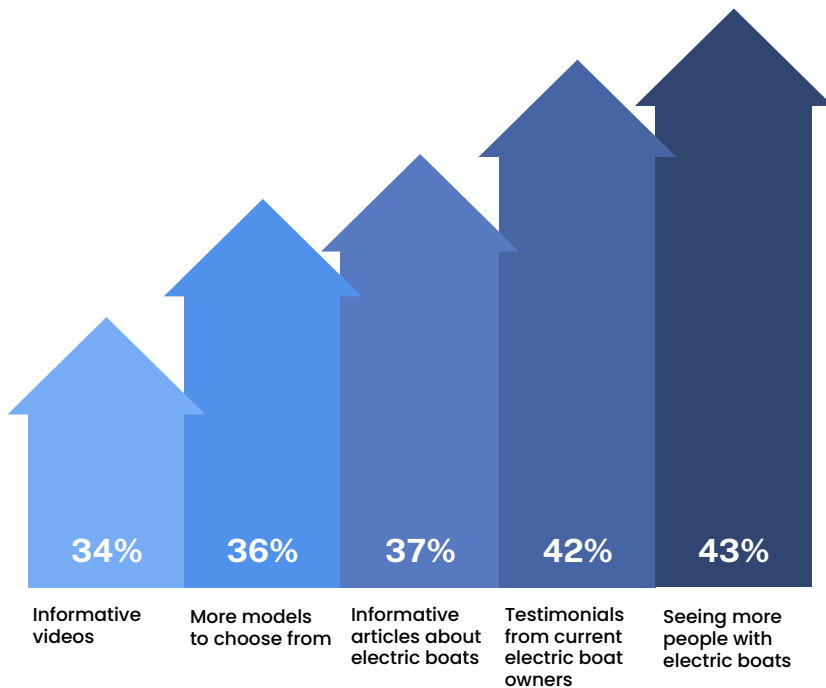


We want to explain our customers the operation of our products. At our website you can find for each product the most relevant information.

- To let you understand the way of installation and the important points of our products you can download manuals.
- To let you understand the extremely limited size of our products and to easily integrate it in your design you can download 3D Step files.
- To let you understand the characteristics of our products you can download brochures.


System functionalities

Offering additional system features for an electric application is vital. These features improve the experience, efficiency and safety for the user. We offer the following additional functionalities: Sensitivity mode, side-shift parking mode, differential steering and cruise control.

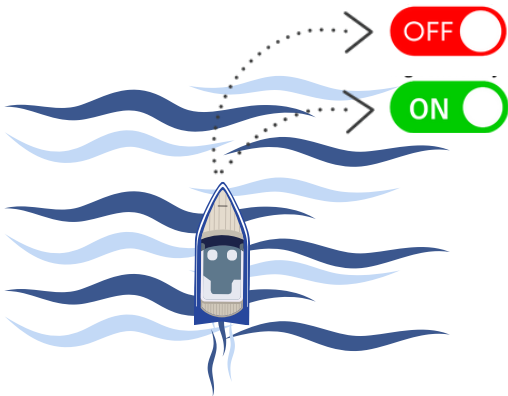


Steering sensitivity mode

With this function the sensitivity of the throttle can be determined by a single button. This function makes it possible to steer very accurate in smaller spaces.

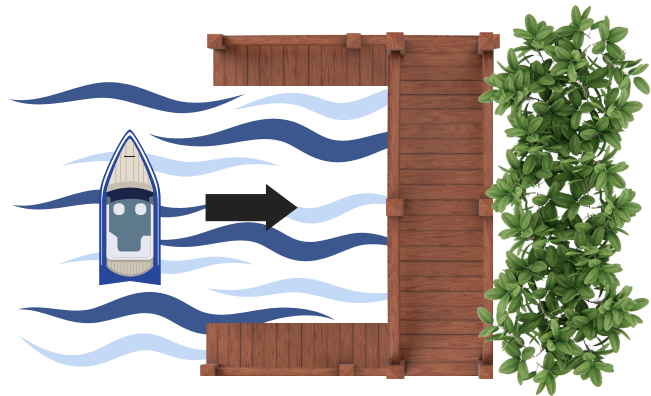


Side- shift parking mode

A parking function on a boat is crucial when docking. It provides precise control and stability, allowing for safe and easy boat parking.

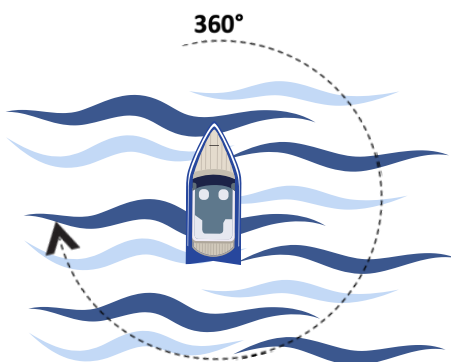

Steering sensitivity mode

Differential steering makes it possible to rotate on your position with two fixed pods. We have realized an algorithm which calculates which motor should run in forward or reverse mode and at which RPM.

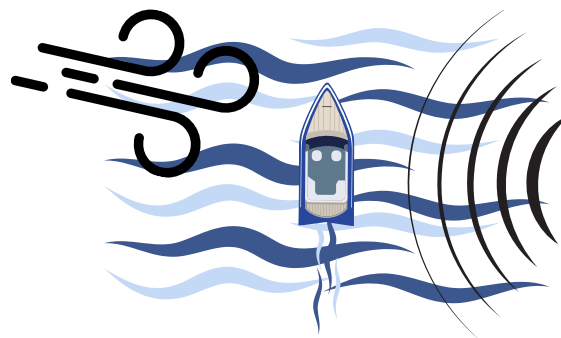

Magnetic compass

This feature corrects currents and wind influences, making it possible to sail a straight course for a long time. It minimizes deviations and provides a relaxed and stable sailing experience.





Batteries and chargers

12V batteries

12V 60Ah



12V 100Ah



12V 200Ah



48V batteries

48V 60Ah



48V 100Ah



48V 200Ah



Chargers

48V 1350W



48V 2000W



48V 3300W



Our unique batteries

The high energy density, combined with no maintenance costs and affordable pricing makes these batteries the perfect candidate for those who wish to be powered electric. There are multiple technical advantages of our batteries that make a Rim Drive Technology battery a pleasure to use.

Why a Rim Drive battery?



A Rim Drive battery has a high **energy density**.

Our **lightweight** and **powerful** batteries use the **latest technology** for incredible weight savings.

Due to the **minimal dimensions**, the battery can be used for many applications.

Our batteries are **maintenance-free**, so no service attention is required.

To provide the best customer experience, our batteries work **efficiently** with all our products.



Batteries

The best solution for full day operation

Characteristics



Integrated BMS



High energy density



No maintenance



Affordable pricing

Type

	12V 60Ah	12V 100Ah	12V 200Ah	48V 60Ah	48V 100Ah	48V 200Ah
Nominal voltage	12.8V	12.8V	12.8V	51.2V	51.2V	51.2V
Nominal capacity	60Ah	100Ah	200Ah	60Ah	100Ah	200Ah

Dimensions

	12V 60Ah	12V 100Ah	12V 200Ah	48V 60Ah	48V 100Ah	48V 200Ah
Weight (kg)	7.6	12.7	28.1	30	50	75
Dimensions (LxWxH)	26x17x22 cm	33x17x23 cm	52x27x23 cm	34x33x26 cm	51x35x26 cm	60x42x24 cm

Temperatures

Environment	Details	Minimum	Maximum
Operating temperature	Charge	0°C	45°C
	Discharge	-20°C	65°C
Storage temperature	1 month	-20°C	60°C
	3 months	-20°C	45°C
	12 months	-20°C	20°C

Certification standards

EN IEC 61000-6 1:2019
EN 61000-6 3:2007 + A1:2011 + AC:2020
EN IEC 61000-3-2:2019
EN 6100-3-3:2013 + A1:2019
EN-IEC 62620:2015
EN-IEC 62619:2022
Optional: notified body certification

New generation

All batteries have an integrated BMS. The batteries can be connected up to 4 pieces in parallel.

With our new generation of LiFePO4 batteries, we aim to make the use of batteries both easy and affordable.

In case you want to have high voltage batteries, please contact our sales team.

Battery specifications

	12V 60Ah	12V 100Ah	12V 200Ah
Max. continues charge current	30A	50A	100A
Max. continues discharge current	60A	100A	100A
Max. instantaneous discharge current	120A	200A	200A
Maximum charge voltage	14.6V	14.6V	14.6V
Discharge cut-off voltage	10V	10V	10V

All batteries are supplied with handles.

Battery specifications

	48V 60Ah	48V 100Ah	48V 200Ah
Max. continues charge current	30A	50A	100A
Max. continues discharge current	120A	125A	200A
Maximum charge voltage	58.4V	58.4V	58.4V
Discharge cut-off voltage	35.2V	35.2V	35.2V

All batteries are supplied with handles.

Chargers

Chargers to keep you connected and powered up

Characteristics



High efficiency



Low weight



IP67 sealed



Compact design

Specs

	1350W	2000W	3300W
Nominal voltage	48V	48V	48V
Max. charge voltage (V)	58,4	58,4	58,4
Max. charge current (A)	25	35	50
Weight (kg)	3,5	4,5	6
Dimensions (mm)	281x128x85	282x181x98	350x188x99
IP-rating	67	67	67

Accessories

Throttle controls

Single- Top



Single- Side



Double- Standard



Throttle controls

Bow thruster finger joystick



Steerable POD joystick



Chargers



Display 5'



Display 7'



Display 9'

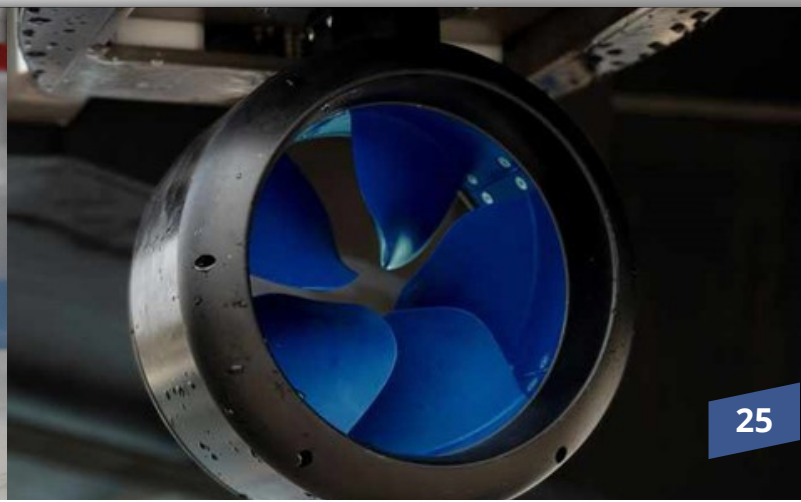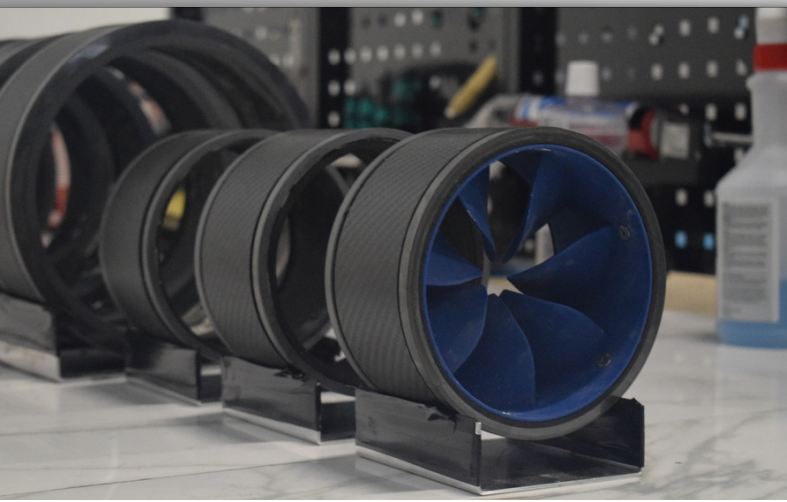

Throttle controls

Our unique throttle control for ultimate compability

All our throttle controls are lightweight, and easy to use. Through intensive testing, a reliable throttle has been created that can guarantee the safety of the user on the water.

Characteristics

 Contactless sensor



Saltwater resistant



Interchangeable handle design



Compact design

Specs

	Single- Top	Single- Side	Double- Standard
Technology	Hall effect sensor	Hall effect sensor	Hall effect sensor
Rated voltage	5V	5V	5V
Output voltage	0.8V - 4.2V	0.8V - 4.2V	0.8V - 4.2V
Operating temperature range	-25°C to +55°C	-25°C to +55°C	-25°C to +55°C
Storage temperature range	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Mechanical angle	±90	±90	±90

Classification

	Single- Top	Single- Side	Double- Standard
Protection class	IP68	IP68	IP68
Weight (kg)	0.6	0.4	2
RPM control	Analog (optional PWM)	Analog (optional PWM)	Analog (optional PWM)
Standard cable length	±20 cm or at request	±20 cm or at request	±20 cm or at request
Connector	2x AMP SuperSeal 3-pin	2x AMP SuperSeal 3-pin	2x AMP SuperSeal 3-pin



Displays

Provides the right information at the right time

All our displays have a waterproof design with an extremely bright display. The display shows important information such as estimated battery life, battery charge status, power consumption, etc.

Characteristics



Intelligent warnings



Water- and dustproof



Bright display



Advanced multi-touch

Specs

	Display 5'	Display 7'	Display 9'
Voltage	8-28V DC	8-28V DC	8-28V DC
Operating temperature	-25 to 60°C	-25 to 60°C	-25 to 60°C
Consumption	440mA 12V	650mA 12V	800mA 12V
IP rating	IPX6	IPX6	IPX6
Connection	WIFI	WIFI	WIFI
GPS	Yes	Yes	Yes
Multi-language	Yes	Yes	Yes
Alarms	Visual and audible	Visual and audible	Visual and audible
Auto-on	Yes	Yes	Yes



RIM DRIVE TECHNOLOGY



**Uncompromised
Electric Motors**

www.rimdrivetechology.nl

+31 (0) 85 482 48 55

Info@rimdrivetechology.nl